



# Dimensions and Fitting Data

## Side doors

### Side door, single-leaf

Vertical view Door with threshold



Horizontal view

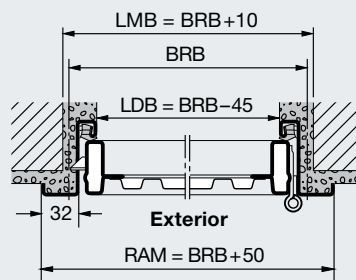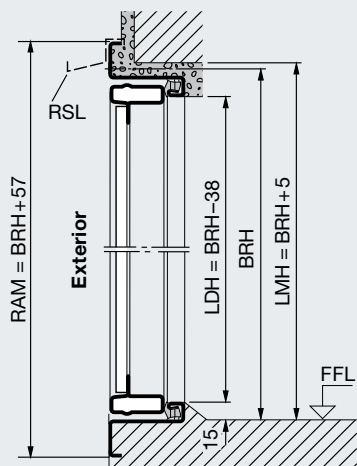

### Side door, double-leaf

Vertical view Door with threshold

Horizontal view

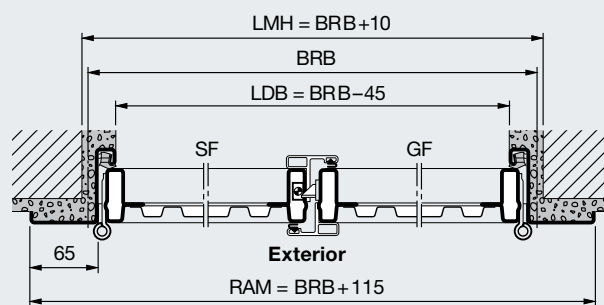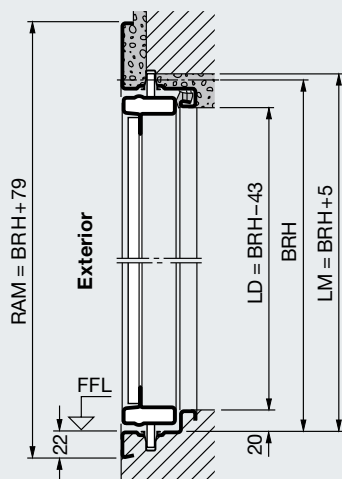

### Side door, single-leaf

#### Standard sizes

Ordering size		Structural opening		Clear passage dimension with threshold		Lever height
BRB	BRH	LMB	LMH	LDB	LDH	From FFL
875	1875	885	1880	830	1837	987.5
	2000	885	2005	830	1962	1050
	2125	885	2130	830	2087	1112.5
1000	2000	1010	2005	955	1962	1050
	2125	1010	2130	955	2087	1112.5

Special sizes and versions on request.  
Max. size range (BR): 1250 x 2375 mm.

Standard sizes with steel infill and on-site infill doors are supplied for external fitting as standard. Internal fitting is possible by reversing the hinges. Styles with timber infill overlapping the frame are only possible with external fitting.

Block frame for fitting in the opening: dimensions and versions on request.

### Explanation of dimensions

- Ordering size**
- BRB Nominal size width
  - BRH Nominal size height
  - LMB Structural opening width
  - LMH Structural opening height
  - RAM B Overall frame dimension width
  - RAM H Overall frame dimension height
  - LDB Clear passage width
  - LDH Clear passage height
- The clear passage width is reduced if the opening angle is less than 180°.
- RSL Rain canopy
  - SF Fixed leaf
  - GF Traffic leaf
- \* LDH without threshold + 15 mm

### Side door, double-leaf


#### Size range

Width (BRB) 1300 to 2500 mm  
Height (BRH) 1750 to 2250 mm


Block frame for fitting in the opening: dimensions and versions on request. As standard delivered for external fitting, traffic leaf on right hand side, state on order if internal fitting or traffic leaf on left hand side is required!

### Fitting variants

#### External fitting opening outwards

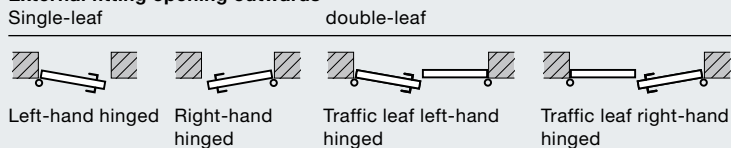

#### Internal fitting opening inwards

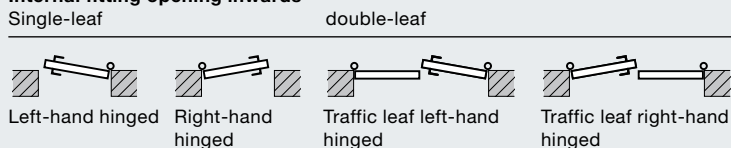

With doors fitted on the inside, the threshold angle or transport angle must always be removed and a water run-off to the outside must be provided. Doors on the weather side are preferably fitted externally.