


**Ordering Size**


Ordering size is the over guide width (OGW) x guide height (GH).  
Doors up to 3000mm wide have 70mm wide guides  
Clear opening width = ordering size - 140mm  
Doors over 3000mm wide have 90mm wide guides  
Clear opening width = ordering size - 180mm  
Clear opening height = guide height - 110mm  
(to allow for the bottom slat hang-down into the guide)

**Slat Profile**




**Door Guides**

Door guides are 70mm or 90mm wide dependent on door size (see above) and 34mm deep.

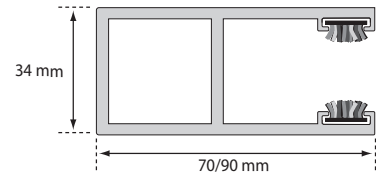


**Fixing Options**

Doors can be fitted within or behind the opening. Suitable clearance must be available for the door guides and box ends. Doors fitting within the reveal must have the box end height (300mm) deducted from the opening height to calculate the guide height (GH).

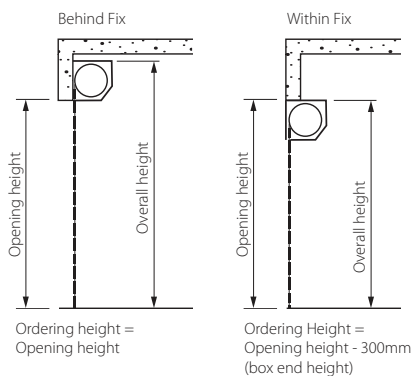


**Box Ends**

The box ends, to which the door mechanism is attached, fit at the top of the guides and are 300mm high and 300mm deep. The overall height of the door is the guide height (GH) + 300mm (box end height).



**Door Box Options**

The box ends can be fitted with an optional half box (90° section) to partially enclose the door mechanism or a full box (90° section + 90° section with 45° return) to fully enclose the door mechanism.




Full and half box (optional extra)

**Control Options**


The door is supplied with an indoor hold-to-run rocker switch as standard. An optional outdoor key switch, Genesis control unit or Teleco Simple control unit are available. The Teleco Simple is supplied with 2 keyfob hand transmitters and a wired safety edge.



Somfy controls for radio and smart control doors. See individual roller door model specifications.




Strong locking straps prevent forced lifting of the door.



The extruded aluminium bottom slat adds extra strength to resist forced entry.



Where applicable, a safety brake prevents the door from dropping in the unlikely event of a motor failure.

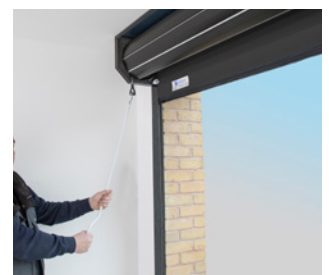

Emergency override means the door can be operated in the event of power failure.

## SIZE RANGE

Doors are available made to measure across the size bands shown:


Guide Height	Over Guide Width (70 mm Guides)			Over Guide Width (90 mm Guides)			
	2000	2500	3000	3500	4000	4600	5200
2000							
2150							
2300							
2450							
2650							

## COLOURS


### Standard Colours



White RAL 9016



Black RAL 9005



Anthracite RAL 7016

### Premium Colours (surcharge applies)




Brown RAL 8014




Chartwell Green



Navy Blue RAL 5011



Burgundy RAL 3004



Light Beige BS 08B17



Fir Green RAL 6009




Ivory RAL 1015



Agate Grey RAL 7038




Silver Metallic RAL 9006




Dark Brown RAL 8019




Moss Green RAL 6005



Cream White RAL 9001




Graphite




Slate Grey RAL 7015



Duck Egg Blue

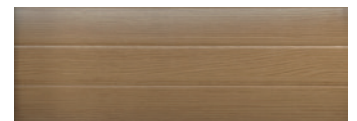

Irish Oak




Golden Oak



Rosewood


### Woodgrain Laminates (surcharge applies)



White Laminate



Black Laminate




Anthracite Laminate




Irish Oak Laminate



Golden Oak Laminate



Mahogany Laminate

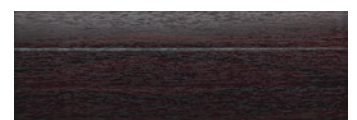

Rosewood Laminate